


## Single Row Angular Contact Ball Bearings

7900 Series-7905DT,7905DF,7905DB,7905C

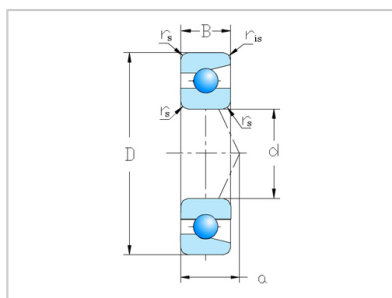

## Bearing Numbers

Single row	<b>7905C</b>
DB	<b>7905DB</b>
DF	<b>7905DF</b>
DT	<b>7905DT</b>

## Principal dimensions(mm)

d	25
D	42
B	<b>9</b>
r(min)	0.3
r1(min)	0.15

## Basic load ratings(N)

Cr	7850
Cor	5400

## Basic load ratings(kgf)

Cr	800
Cor	555

## Value

fo	15.5
----	------

## Limiting Speed (rpm)

Grease	24000
Oil	34000

## Distance of action point(mm)

a	<b>9</b>
---	----------

## Abutment and fillet dimensions

da(min)	27.5
Da(max)	39.5
ra(max)	0.3

## Weight

(kg)	0.042
------	-------

## Basic load ratings(duplex bearing) (N)

Cr	12700
Cor	10800

## Basic load ratings(duplex bearing) (kgf)

Cr	1300
Cor	1110

## Limiting Speed(duplex bearing) (rpm)

Grease	19000
Oil	26000

## Distance of action point (duplex bearing)(a0)

back-to-back	18
--------------	----

## arrangement

face-to-face	<b>0</b>
--------------	----------

## arrangement

## Installation dimensions(duplex bearing)

db(min)	ago
Db(max)	40.8
rb(max)	0.15

Angular contact ball bearings have inner and outer ring raceways that are displaced relative to each other in the direction of the bearing axis. This means that these bearings are designed to accommodate combined loads, i.e. simultaneously acting radial and axial loads.

The axial load carrying capacity of angular contact ball bearings increases as the contact angle increases. The contact angle is defined as the angle between the line joining the points of contact of the ball and the raceways in the radial plane, along which the combined load is transmitted from one raceway to another, and a line perpendicular to the bearing axis

**The most commonly used designs are:**

single row angular contact ball bearings

double row angular contact ball bearings

four-point contact ball bearings

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com