


Tapered Roller Bearing

30200 Series-30212J2/Q

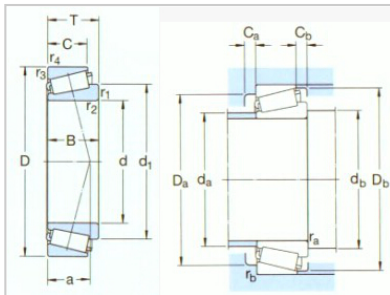

Designation	30212J2/Q
Principal dimensions [mm]	
d1	60
D	110
B	23.75
Basic load ratings [kN]	
dyc(Cr)	112
stc(Cor)	114
Pu	13.2
Speed ratings [rpm]	
Speed Ratings	5000
Limiting Speed	6000
Weight(Kg)	0.88
ISO335	
Dimensions (ABMA)	3EB
Dimensions [mm]	
d	60
d1	81.5
B	22
C	19
r1,2(min)	2
r3,4(min)	1.5
a	22
Abutment and fillet dimensions [mm]	
da(max)	70
db(min)	68
Da(min)	96
Da(max)	103
Db(min)	103
Ca(min)	4
Cb(min)	4.5
ra(max)	2
rb(max)	1.5
Value	
e	0.4
Y	1.5
Yo	0.8

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly

and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com