


Tapered Roller Bearing

32200 Series-32216J2/Q

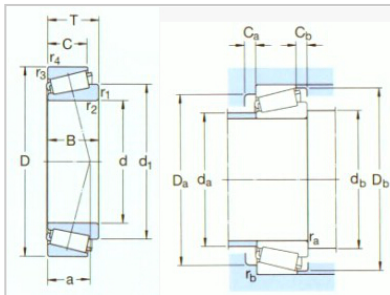

Designation	<b>32216J2/Q</b>
Principal dimensions [mm]	
d1	80
D	140
B	35.25
Basic load ratings [kN]	
dyc(Cr)	187
stc(Cor)	245
Pu	28.5
Speed ratings [rpm]	
Speed Ratings	3400
Limiting Speed	4500
Weight(Kg)	2.05
ISO335	
Dimensions (ABMA)	3EC
Dimensions [mm]	
d	80
d1	106
B	33
C	28
r1,2(min)	2.5
r3,4(min)	<b>2</b>
a	30
Abutment and fillet dimensions [mm]	
da(max)	91
db(min)	90
Da(min)	122
Da(max)	130
Db(min)	134
Ca(min)	5
Cb(min)	7
ra(max)	<b>2</b>
rb(max)	<b>2</b>
Value	
e	0.43
Y	1.4
Yo	0.8

Tapered roller bearings have tapered inner and outer raceways and rollers to handle simultaneous radial and thrust loads. Their axial load carrying capacity is directly related to the contact angle of the rollers and raceway shaft.

They are available in single-row, double-row, and four-row designs. The individual parts of tapered roller bearings are commonly sold separately as cups and cones. Cones contain the roller assembly

and inner ring while cups include the outer ring. Full assembly units contain both the cup and cone. As separable bearings, different designs and sizes are available to accommodate a variety of applications.

Luoyang Auto Bearing Co.,Ltd-Tel:0598-3607100-Email:moore@lyautobearing.com-http://www.auto-bearing.com